Premiere – Assembly Instruction

MERRYFAIR®

1

BACKREST

FLANGE BOLT

SIDE PANEL

min. 4mm
max. 5mm

FRONT VIEW OF SIDE PANEL
Distance Between Flange Bolt & Side
Panel : min. 4mm & max. 5mm

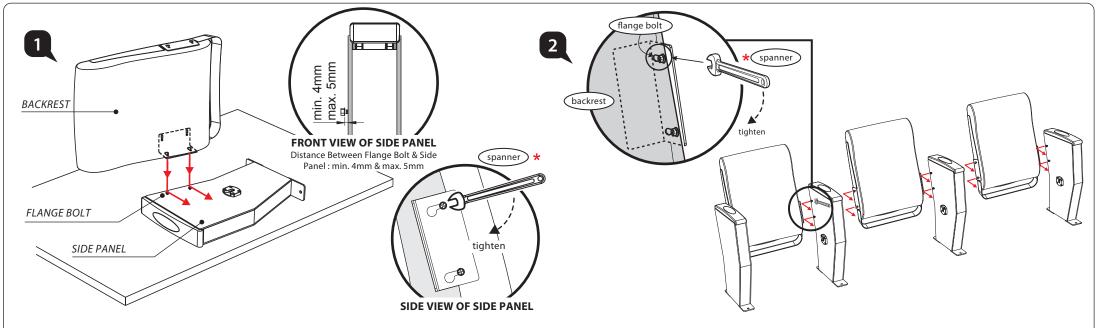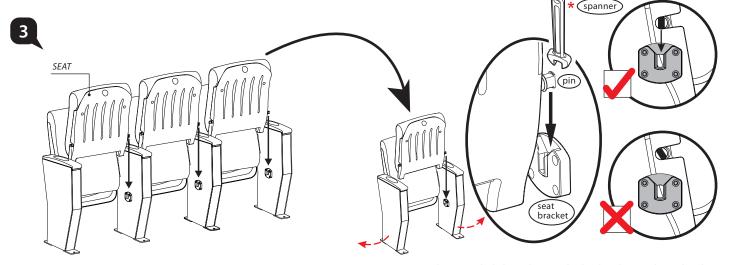spanner *

tighten

SIDE VIEW OF SIDE PANEL
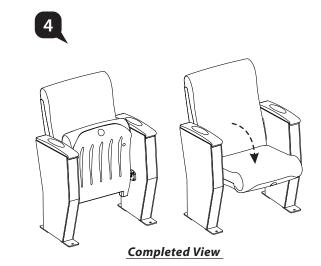
2

flange bolt

backrest

* spanner

tighten

1a - For installing the 1st chair, you're recommended to put side panel in *horizontal* way.
1b - Slot the backrest into the Flange Bolt which is prefix on the side panel, then slide the
backrest into the direction as shown above. Tighten the flange bolt by using *spanner.

2a - Return the chair into *Vertical* position.
2b - Slot another side panel into the chair and tighten the flange bolt by using *spanner.
2c - Repeat step *1b* and *2b*.

3

SEAT

* spanner

pin

seat
bracket

✔

✘

3a - Slot the seat into the seat bracket at side panel.

NOTE: You have to slightly widen-up the both side panels to slot the seat
into the bracket. You may use *spanner to help you to adjust
the pin so that it's parallel to the seat bracket.

4

Completed View

✱ NOT INCLUDED