
## Assembly Instruction




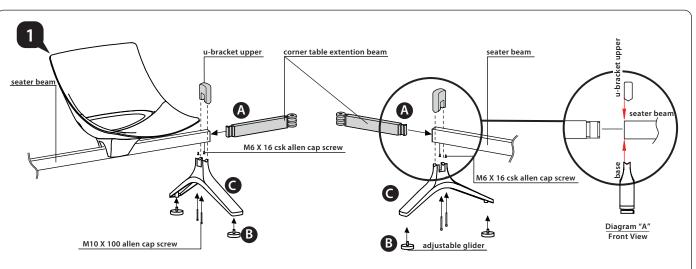

A Insert the corner table extention beam into end of seater beam by using rubber hammer and tighten with M6 X 16 CSK allen cap screw.

**B** Insert adjustable glider into base.

**C** Slot u-bracket upper (or armrest) & base into seater beam and tighten with M10 X 55 allen cap screw.

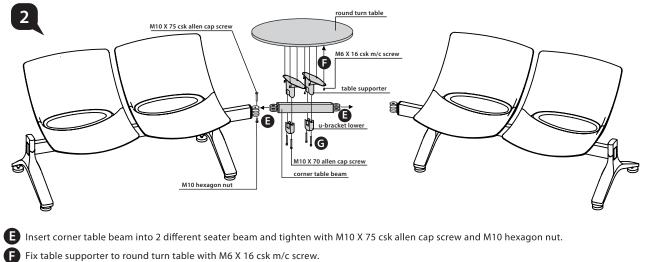

G Slot round turn table + table supporter and u-bracket lower into corner table beam and tighten with M10 X 70 allen cap screw.

